





**Model: APB201U**

## HD 1080P BULLET IP Camera

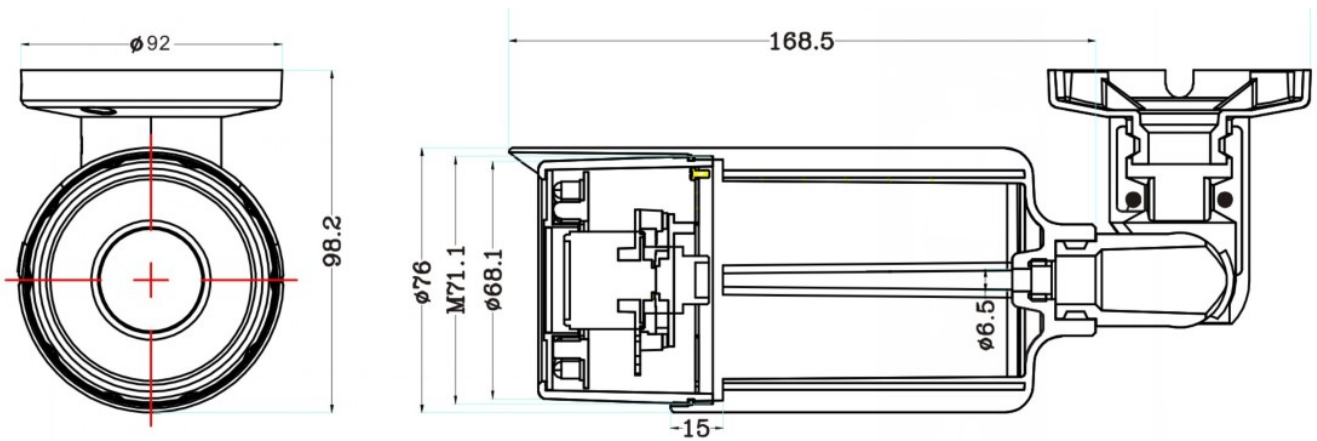

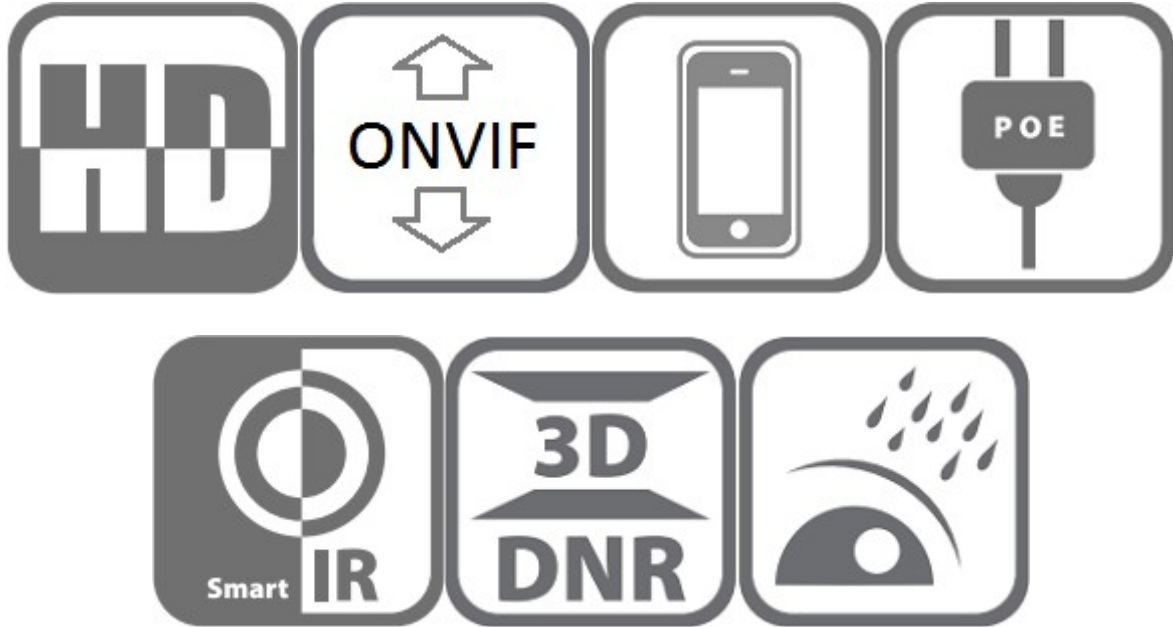

## Features:

- ❖ 1/2.9" CMOS sensor
- ❖ HD resolution 1984x 1105
- ❖ Ultra low illumination 0.01Lux
- ❖ Day/Night (ICR), AWB, AGC, BLC, 2D/3D-DNR, IR-CUT
- ❖ Motion Detection, Privacy Mask, Mirror
- ❖ RTSP and Onvif 2.4 compatible
- ❖ H.264 dual-stream media server
- ❖ Easy-to-use P2P Cloud service
- ❖ Multi web browser, PC Client, mobile APP remote access
- ❖ Built-in POE 802.3af.
- ❖ Lightning protection 4000V
- ❖ Strong water-proof housing, IP66
- ❖ 6 pcs Array IR Leds, IR distance 30-40 meters
- ❖ 2.8-12 mm VF lens



## Technical Specifications:

<b>Model</b>	<b>APB201U</b>
<b>Camera</b>	
Image Sensor	1/2.9" CMOS
Effective Pixels	1984(H)×1105 (V)
Electronic Shutter	AUTO, 1/25s ~ 1/100000s
Min. Illumination	0.01Lux@F1.2(AGC ON), 0Lux IR on Auto/
Day/Night	Color/(B/W)/Timing
White Balance	Auto/Indoor/Outdoor
AGC/BLC	Support
DNR	2D/3D DNR
Other	Motion Detection, Privacy Mask, Mirror,
<b>Encode</b>	
Embedded Solution	Hi3516C
Video Standard	H.264
Video Resolution	Main stream: 1080P/720P@30fps Sub stream: VGA/360P@25fps
Video Bitrates	32Kbps - 6Mbps, VBR/CBR
Audio Standard IR	G.711-u
<b>Led</b>	
IR Led	6 pcs Array IR Leds
IR Distance Lens	30-40 M
<b>Focal length</b>	
focal length	2.8 - 12 mm VF lens
<b>Optional Function</b>	
<b>Network Services</b>	
Protocol	RTSP/FTP/PPPOE/DHCP/DDNS/NTP/UPnP
P2P	Yes
Web	IE , Firefox, etc.
Media	CMS, Android, IOS
ONVIF	2.4 compatible
<b>General</b>	
Network Port	1-RJ45, 100Mbps
PoE	Built-in PoE 802.3af
Power Consumption	< 8 W
Operating Temp.	-30℃-(+60)℃, 10%-90%RH